M333C

30-lb x 2 Capacity Coin Dryer

Standard Features:

- 30-lb. x 2 capacity
- 10.1 cu. ft. volume
- 72,000 Btu/hr heat input, 400 cfm airflow per pocket
- Partial axial airflow
- Steel door with gasketless glass
- Single 8" diameter top exhaust connection
- 1/2" gas connection per pocket
- Single coin drop
- Fits through a standard 36" door
- Available in gas heat
- · Available in gray, white and stainless steel front and cabinet



M333C Coin Stack Dryer

Why Purchase Milnor M333C?



Engineer Driven Design That is Built to Last

Our dryers showcase an engineer-driven approach to design. Bearings are permanently lubricated on the motor and drive system. There are no chains used; rather, we use V-belts and pulleys for smooth, quiet, and trouble free operation. Our dryer cabinets are electrostatically powder-painted inside and out then baked at 420-degrees fahrenheit before final assembly - ensuring the hardest surface and the longest lasting finish in the industry.

Rugged Steel Door with Gasketless Door Glass

Our dryer doors are one solid piece of steel with gasketless glass. This eliminates the issue of glass falling out due to wear and tear on rubber gaskets that some manufacturers use to secure their glass. The security and durability that gasketless glass provides is essential to a successful laundromat operation.

More for Less

The M333C incorporates all the state-of-the-art design features from the leader in stack dryer design-with simple controls, an easy-to-read LED screen and a large lightweight lint drawer that is accessible and easy to clean--only requiring cleaning once a day. It's fine stainless steel lint screen is standard. Available for coin or card ready, the M333C gives you all the benefits of Milnor quality engineering at a low cost.

Your local Milnor independent authorized distributor




M333C

M333C Specifications					
Tumbler Capacity (dry weight)	30 lbs. (13.60 kg) x 2				
Tumbler Diameter	27-1/4" (69.21 cm)				
Tumbler Depth	30" (76.20 cm)				
Tumbler Volume	10.1 cu ft (286 L)				
Tumbler/Drive Motor	1/2 hp (0.37 kW)				
Blower/Fan Motor	N/A				
Door Opening (Diameter)	21-1/2" (54.61 cm)				
Door Sill Height top pocket / bottom pocket	52-7/8" (134.3 cm) 14-1/4" (36.2 cm)				
Dryers per 20'/40' Container	11 / 22				
Dryers per 48'/53'Truck	30 / 33				
Width	29-3/4" (75.4 cm)				
Depth	53" (134.5 cm)				
Height	78-1/4" (198.8 cm)				
Airflow 60 Hz 50 Hz	400 cfm (11.3 cmm) 340 cfm (9.6 cmm)				
Exhaust Connection	8" (20.32 cm)				
GAS MODEL: Voltage Available Approx. Net Wt. Approx. Ship Wt. Heat Input (per pocket) Inlet Pipe Connection (per pocket)	120-240v 1,3ø 2,3w 675 lbs (306 kg) 710 lbs (322 kg) 72,000 btu/hr (18,143 kcal/hr) 1/2" F.N.P.T.				

Specifications in parentheses are metric equivalents.

7/12/12

Electrical Service Specifications						
GAS						
SERVICE VOLTAGE	DUACE	PHASE WIRE SERVICE	APPROX AMP DRAW		CIRCUIT	
	PHASE		60 Hz	50 Hz	BREAKER	
120	1ø	2	8.7		15	
208	1ø	2	5.2		15	
240	1ø	2	4.8		15	

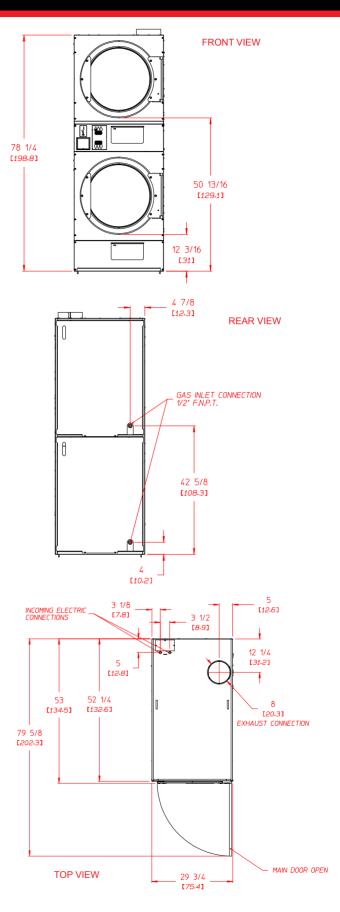



Pellerin Milnor Corporation, PO Box 400, Kenner, LA 70063 USA Phone 504.712.7656 Toll Free: 800.469.8780 Fax: 504.468.3094