# 95-lb Capacity OPL Dryer

#### **Standard Features:**

- 95-lb. capacity
- 22.50 cu. ft basket volume
- 350,000 Btu/hr heat input, 2,700 cfm airflow
- Radial Airflow
- Steel door with gasketless glass
- 16" diameter vent connection
- Fits though standard 36" door
- Large 31 3/8" door
- · Available in gas heat
- · Four-Point Roller Support System
- · Stainless steel basket
- Reversing basket

### **Optional Features:**

- Stainless steel front and cabinet
- F.S.S. (Fire Suppression System)



M96 OPL Dryer

## **Why Purchase Milnor M96?**

#### **Engineer Driven Design That is Built to Last**

Our dryers showcase an engineer-driven approach to design. Bearings are permanently lubricated on the motor and drive system. There are no chains used; rather, we use V-belts and pulleys for smooth, quiet, and trouble free operation. Our dryer cabinets are electrostatically powder-painted inside and out then baked at 420-degrees fahrenheit before final assembly ensuring the hardest surface and the longest lasting finish in the industry.

#### **Rugged Steel Door with Gasketless Door Glass**

Our dryer doors are one solid piece of steel with gasketless glass. This eliminates the issue of glass falling out due to wear and tear on rubber gaskets that some manufacturers use to secure their glass. The security and durability that gasketless glass provides is essential to longevity.

#### **Easy-to-Read, Multilingual Controls**

Our dryers were one of the first computer operated dryers on the market and we continue to apply innovative technology to dryer operation. Our accessible design, easy-to-read LED screens and our user friendly multilingual interface positions Milnor as a leader in the laundry industry.

Your local Milnor independent authorized distributor




# M96

M96 Specifications				
Tumbler Capacity (dry weight)	95 lbs. (43.09 kg)			
Tumbler Diameter	43-3/8" (110.19 cm)			
Tumbler Depth	28-7/8" (73.34 cm)			
Tumbler Volume	22.50 cu ft (637.13 L)			
Tumbler/Drive Motor	1/2 hp (0.37 kW)			
Blower/Fan Motor	3 hp (2.24 kW)			
Door Opening (Diameter)	31-3/8" (79.71 cm)			
Door Sill Height	24-1/2" (62.23 cm)			
F.S.S. Water Connection  North America Outside North America	3/4" - 11.5 NH 3/4" B.S.P.T.			
Dryers per 20'/40' Container	10 / 20			
Dryers per 48'/53'Truck	24 / 26			
Width	46-1/8" (117.2 cm)			
Depth	35-1/4" (89.5 cm)			
Height	82-3/8" (209.2 cm)			
Airflow 60 Hz 50 Hz	2,700 cfm (76.46 cmm) 2,250 cfm (63.71 cmm)			
Exhaust Connection	16" (40.64 cm)			
GAS MODEL:  Approx. Net Wt. Approx. Ship Wt. Heat Input  Inlet Pipe Connection  Compressed Air Connection Compressed Air Volume	1,087 lbs (493.05 kg) 1,157 lbs (524.81 kg) 350,000 btu/hr (88,199 kcal/hr) 1" F.N.P.T. 1" B.S.P.T. (CE and Austrailia Only) 1/4" Quick Connection 4.25 cfh (0.12 cmh)			


 $Specifications\ in\ parentheses\ are\ metric\ equivalents.$ 


REV 03/20/18

Electrical Service Specifications						
GAS						
SERVICE PHASE	WIRE	APPROX AMP DRAW		CIRCUIT		
VOLTAGE	PHASE	SERVICE	60 Hz	50 Hz	BREAKER	
208	3ø	3	12.0		15	
230	3ø	3		8.0	15	
240	3ø	3	10.0		15	
380	3ø	4*		6.0	15	
400	3ø	4*		5.0	15	
416	3ø	4*		5.0	15	
460	3ø	3	6.0		15	
480	3ø	3	6.0		15	



**PLAN VIEW** 



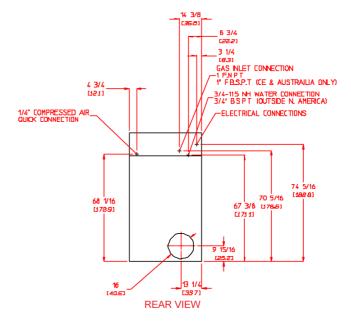



Pellerin Milnor Corporation, PO Box 400, Kenner, LA 70063 USA, Phone 504.712.7656 Toll Free: 800.469.8780 Fax: 504.468.3094