
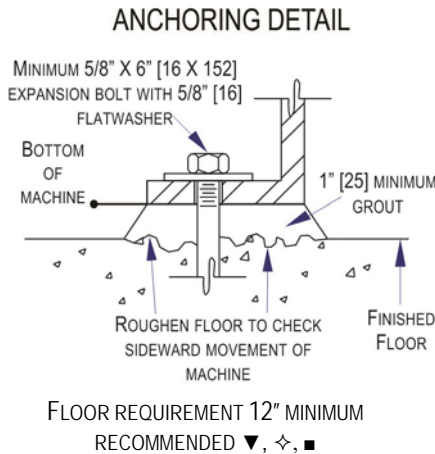
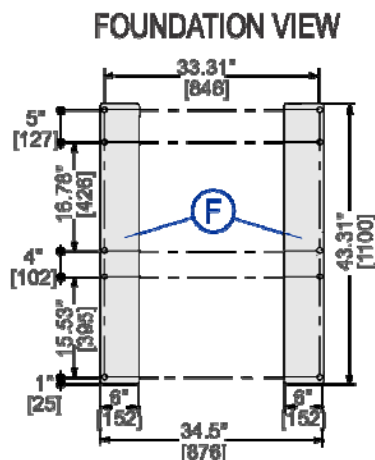


# 30022 T6X

60 LB. (27KG) CAPACITY

RIGID-MOUNT WASHER-EXTRACTOR

## SPECIFICATION SHEET

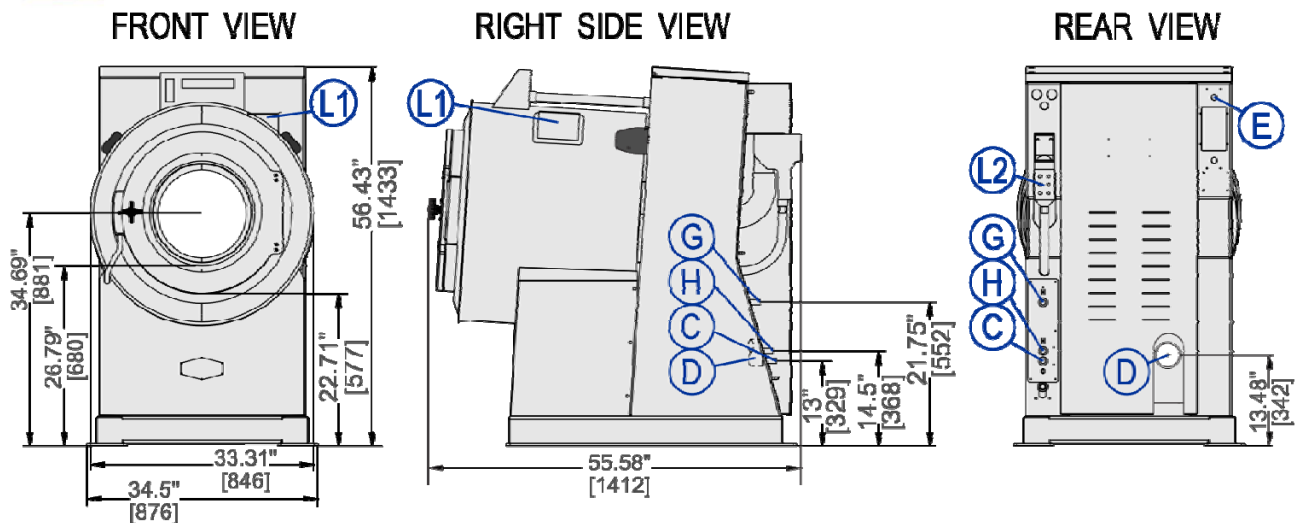

| LEGEND |   |
|--------|---|
| C      | Cold water inlet, .75" (19 mm) GHT                          |
| D      | Drain to sewer, 3" (76 mm) pipe connection                  |
| E      | Electrical connection                                       |
| F      | Foundation pads, anchor bolt holes .625" (15.8 mm) diameter |
| G      | Hot water (chemical flushing), 0.75" (19 mm) GHT            |
| H      | Hot water inlet, .75" (19 mm) GHT                           |
| L1     | Liquid supply inlets  |
| L2     | Soap chute  |

### MECHANICAL SPECIFICATIONS

### ELECTRICAL SPECIFICATIONS

|  |  |
|--|--|
| Capacity – lb. (kg)                                      | 60 (27)                                  |
| Cylinder Diameter x Depth – in. (mm)                     | 30 x 22 (762 x 559)                      |
| Cylinder Volume – cu. ft. (L)                            | 9 (255)                                  |
| Door Opening – in. (mm)                                  | 15.5 (394)                               |
| Machine Dimensions (W x D x H) – in. (mm)                | 34.5 x 55.58 x 56.43 (876 x 1412 x 1433) |
| Shipping Dimensions (W x D x H) – in. (mm)               | 40 x 64 x 63 (1016x1625x1600)            |
| Motor – HP (kW)  | 4 (2.98)                                 |
| Wash Speed – RPM   | 38                                       |
| Distribution Speed – RPM                                 | 65                                       |
| Extraction Speed – RPM                                   | 573                                      |
| Extraction G-Force                                       | 140                                      |
| Static Weight – lb. (kg) ◇                               | 1344 (609)                               |
| Max. Dynamic Load RMS – lb. (kg) ◇                       | 1590 (721)                               |
| Frequency (Hz)   | 10                                       |
| Water Pressure (Required) – psi (bar)                    | 5-75 (0.34-5.17)                         |
| Water Valve Cv Rating                                    | 1.5 (5.7)                                |
| Minimum Recommended Distance Between Machines – in. (mm) | 6 (152.4)                                |

| Voltage      | Running Amps | Fuse (Amps) | Circuit Breaker (Amps) |
|--------------|--------------|-------------|------------------------|
| 220/3/50-60  | 7            | FRN15       | 15                     |
| 208,240/1/60 | 14/12        | FRN20       | 20                     |
| 208,240/3/60 | 8/7          | FRN15       | 15                     |
| 380/3/50-60  | 4.5          | FRS15       | 15                     |
| 415/3/50     | 4.5          | FRS15       | 15                     |
| 480/3/60     | 3.5          | FRS15       | 15                     |

See Fuse and Wire Size manual MAEFUSE1BE for safety information. Contact factory regarding single phase availability.

▼ See dimensional drawing for complete details.

◇ It is the sole responsibility of the owner/user to assure that the floor and/or any other supporting structure exceeds not only all applicable building codes, but also that the floor and/or any other supporting structure for each washer-extractor or group of washer-extractors has sufficient strength and rigidity (i.e., a natural or resonant frequency many times greater than the rotational machine speed with a reasonable factory of safety) to support the weight of all the fully loaded machine(s) including the weight of the water and goods, and including the published 360° rotating sinusoidal RMS forces that are transmitted by the machine(s). Contact the factory for additional machine data for use by a structural engineer.

■ Machine bases made from concrete should either be part of a monolithic pour or should be tied into foundation and not isolated from existing floor.



# 30022 T6X

60 LB. (27KG) CAPACITY  
RIGID-MOUNT WASHER-EXTRACTOR

## SPECIFICATION SHEET

### Standard Features:

- RinSave® water saving technology
- 4 speeds
- E-P Express® programmable controller
- Vacuum fluorescent display
- Single-motor inverter drive
- Tall, lifting ribs
- High M.A.F. (Mechanical Action Factor)
- Large cylinder perforations
- Fresh-water flushing chemical manifold
- Auto tension V-belt drive
- Six (6) liquid chemical injection ports
- Control reads in English/second language
- 5-year limited warranty on frame, cylinder & shell



### Optional Features:

- Prison package
- Faster fill water valves

### Why Purchase Milnor?


- Larger cylinder volume than most competitive similar sized washer-extractors provides *greater productivity*. More linen washed per day, or fewer hours required to process. **BENEFIT: Saves labor.**
- Greater cylinder perforated-area generates *better wash* quality, *better rinsing* and *better extraction*. **BENEFIT: Better extraction saves dryer fuel.**
- Faster process times reduce fabric wear, promoting *longer linen life!* **BENEFIT: Saves linen replacement costs.**
- Tall perforated ribs provide excellent lift and high drop. **BENEFIT: Greater mechanical action (M.A.F.) leads to better wash quality.**
- 140-G high extract provides excellent moisture removal. Lower extract speeds are available for uniforms, delicate textiles and blended fabrics. **BENEFIT: Better extraction saves dryer fuel.**
- E-P Express Controller with vacuum fluorescent display allows operator to choose formulas from real words, not codes. Standard controller features English/Spanish (other languages optional). Controller also provides diagnostic and error messages. Shortens training time of new employees. **BENEFIT: Fewer operator errors.**
- Superior product support through local, highly-skilled dealers. **BENEFIT: Faster repairs mean less downtime.**



Safe chemical injection



Superior cylinder design



Solid industrial frame

Contact Milnor for your local, authorized dealer:

Pellerin Milnor Corporation  
P.O. Box 400 • Kenner, LA 70063  
t: 504-467-9591 • f: 504-468-3094

