

## SPECIFICATIONS

# MAT20PD - EXPORT TOP-LOAD WASHER



### DEEP-WATER WASH SYSTEM

- Provides optimal wash performance with deep-water wash and rinse cycle options and vigorous cleaning action.
- Traditional flex-vane agitator provides four distinct wash profiles—from aggressive to gentle—designed to pull clothes from the top to the bottom of the wash basket.
- PowerWash® cycle provides more agitation, hotter water, and an extra rinse for the dirtiest loads.



### INTELLIGENT CONTROLS WITH M-SERIES TECHNOLOGY

- Puts owners in charge of their profits, and provides wash-cycle flexibility to end users.
- Simple, step-by-step customized set-up allows each cycle to be priced individually.



### POWERFUL DRIVE SYSTEM

- Enhanced design of the triple-lip seal and stainless-steel shaft, in addition to the premium bearings, delivers reliability and consistency.
- Powerful ½-HP PSC motor and quad-gear transmission create an efficient wash for every load.



### HEAVY-DUTY CABINET

- Possesses the strength needed for high-demand commercial environments.
- Sturdy front panel, side panels, and easy-access base are all manufactured from high-grade, extra-strength galvanized steel.



REMOVABLE FRONT PANEL



PREMIUM PORCELAIN  
ENAMEL TOP & LID



EASY-ACCESS STEEL BASE

## SPECIFICATIONS



# MAT20PD - EXPORT TOP-LOAD WASHER



## MAYTAG® COMMERCIAL TOP-LOAD WASHER INTELLIGENT CONTROLS, COIN-DROP

WASHER SPECIFICATIONS	
MODEL	MAT20PDAGW / EXPORT
MOTOR SIZE — HP (KW)	1/2 (.37)
APPROXIMATE WATER USAGE	
Average Total Water Usage Per Cycle — Gallons (liters)*	17.85 (67.6)
Average Hot Water Usage, Warm Water Cycle — Gallons (liters)	.56 (2.1)
Average Hot Water Usage, Hot Water Cycle — Gallons (liters)	7.03 (26.6)
EXTRACT SPEED — MAX G-FORCE / MAX RPM	144 / 700
CAPACITY	
Cylinder Volume — cu. ft. (liters)	3.27 (92.6)
Cylinder Diameter — in. (mm)	20.8 (528)
Cylinder Depth — in. (mm)	23.8 (605)
DIMENSIONS	
Width — in. (mm)	27 (686)
Depth — in. (mm)	26 (660)
Height — in. (mm)	44 1/2 (1,130)
Lid Opening — in. (mm)	17 (432)
CRATED DIMENSIONS	
Width — in. (mm)	29 (737)
Depth — in. (mm)	27.5 (699)
Height — in. (mm)	49 (1,255)
APPROXIMATE WEIGHT	
Uncrated — lbs. (kg)	159 (72.1)
Crated — lbs. (kg)	177 (80.3)
ELECTRICAL REQUIREMENTS	
Electrical Rating — Voltage / Hz	220 — 240 / 50
Breaker / Fuse — amps	10
WATER INLET / HOSE	
Operating Pressure PSI (bar)	20 — 100 (1 — 8)
Inlet Hose Length — ft. (m)	6 (1.8)
Drain Hose Length — ft. (m)	4.2 (1.3)
WARRANTY	
5-Year Limited	

Dimensions are for planning purposes only. See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

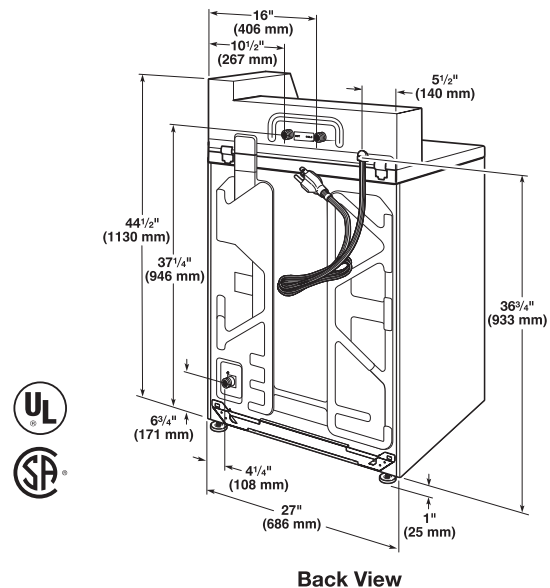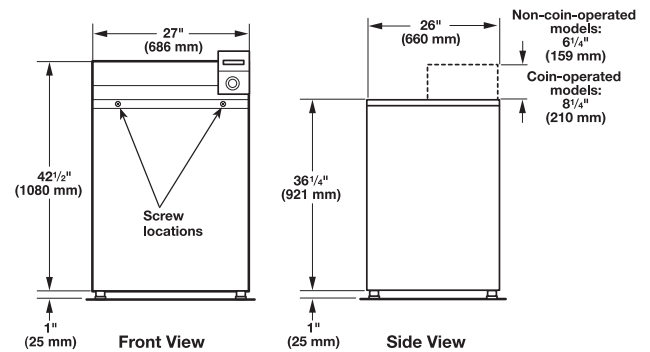

\*Based on 2018 United States DOE J2 Testing with factory preset cycles.



## 5-YEAR LIMITED WARRANTY ALL PARTS COVERED

See [maytagcommerciallaundry.com](http://maytagcommerciallaundry.com)  
for complete warranty details.