

Maytag Commercial 9kg STACK WASHER / DRYER



Available in Non-Coin, Coin Only and Card Only.

All within the floor space of a single unit, the large capacity of this 9kg washer provides ample room for bulky items, while the extra-large, 9kg dryer allows for loads to be dried effectively – maximizing facility productivity.

Available Australia Wide from Dependable Laundry Solutions



Non-Coin unit pictured
MLE22PN / MLG22PN



Coin Drop controls pictured
MLE22PD / MLG22PD

DURACORE DRIVE SYSTEM

Designed and tested to run 15,000 cycles.* A watertight, flexible triple-lip seal with a garter spring helps keep moisture away from the shaft, protecting our premium bearings - while our proven, durable shaft sleeve is designed to reduce shaft wear. These components, along with a die-cast trunnion, result in more cycles over the life of the washer.



SIMPLE TO USE, INTELLIGENT CONTROLS

Intelligent Controls with M-Series Technology help owners increase profitability in Coin and Card laundries. Simple one touch controls ensure ease of use for all who operate the stack washer dryer. Stop / Pause button allows the washer cycle to be interrupted during cycle.



ADVANCED SPIN TECHNOLOGY

Featuring a 6-point suspension system, accelerometer, Progressive Spin Logic, and an optimized pump routine, Advanced Spin Technology helps deliver accurate cycle times and optimal performance for all load types.



TURBOVENT® DRYER TECHNOLOGY

A high-speed blower wheel optimizes performance in long vents, while high airflow reduces drying times for a wide variety of loads, increasing efficiency and turns over the life of the machine.



CREDIT/DEBIT CARD READY

Stack unit can be card only to prevent vandalism and increase safety on site. Card reader accepts any debit, visa, mastercard, paywave, paypass, apple pay and android pay.




DEPENDABLE
LAUNDRY SOLUTIONS

Visit Dependablelaundry.com.au or call **1800 Maytag**


Maytag Commercial 9kg STACK WASHER / DRYER



Warehouses in Brisbane, Darwin, Melbourne, Perth & Sydney

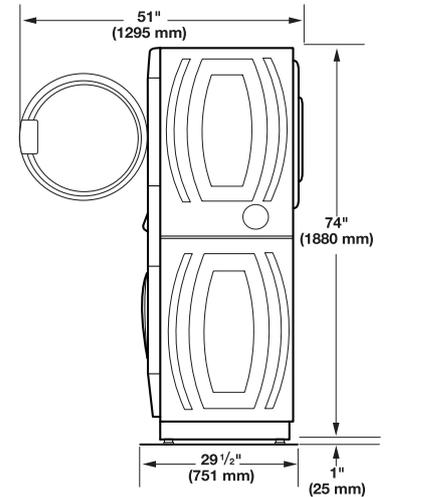

SIDE VIEW

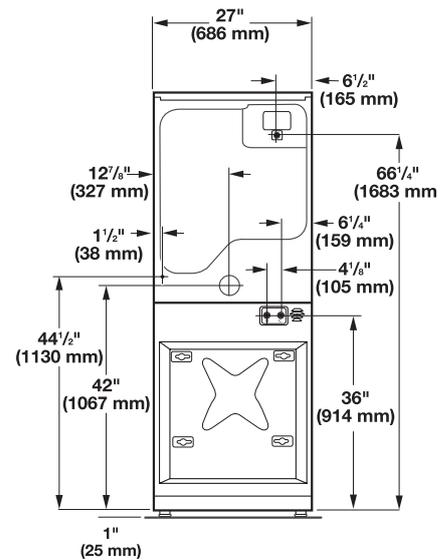

BACK VIEW

See Installation Guide for complete dimension details.



See DependableLaundry.com.au for complete warranty details.

| COIN ONLY READY: NON-COIN: | MLE22PDAGW MLE22PNAGW | MLG22PDAGW MLG22PNAGW |
|-------------------------------|--------------------------|--------------------------|
|-------------------------------|--------------------------|--------------------------|

| | Electric 50hz, 25AMP | Natural Gas (LPG Available) |
|--|-------------------------|--------------------------------|
|--|-------------------------|--------------------------------|

WASHER SPECIFICATIONS

| CAPACITY | | |
|--|------------------|------------------|
| Cylinder Volume — kg | 9kg | 9kg |
| Cylinder Diameter — mm | 547 | 547 |
| Cylinder Depth — mm | 340 | 340 |
| WATER INLET HOSE / DRAIN HOSE | | |
| Operating Pressure - psi (bar) | 20 - 100 (1 - 8) | 20 - 100 (1 - 8) |
| Inlet Hose Length — m | 1.22 | 1.22 |
| Drain Hose Length — m | 1.83 | 1.83 |
| APPROXIMATE WATER USAGE | | |
| Average Total Water Usage Per Cycle — liters* | 40.50 | 40.50 |
| Average Hot Water Usage, Warm Water Cycle — liters | 2.69 | 2.69 |
| Average Hot Water Usage, Hot Water Cycle — liters | 10.26 | 10.26 |
| ELECTRICAL REQUIREMENTS+ | | |
| Voltage | 220-240V | 220-240V |
| Electrical Requirements / Frequency | 50hz | 50hz |
| Breaker / Fuse - amps | 25AMP | 10AMP |
| DIMENSIONS - DOOR OPENING - MM | 362 | 362 |
| EXTRACT SPEED — MAX G-FORCE / MAX RPM | 300 / 1,000 | 300 / 1,000 |
| MOTOR SIZE — HP (KW) | .09 (.07) | .09 (.07) |

DRYER SPECIFICATIONS

| CAPACITY | | |
|--|------------|----------------|
| Cylinder Volume — liters (kg) | 190 (9) | 190 (9) |
| Cylinder Diameter - mm | 666.8 | 666.8 |
| Cylinder Depth - mm | 518.3 | 518.3 |
| ELECTRICAL REQUIREMENTS+ | | |
| Voltage | 220 - 240V | 220 - 240V |
| Electrical Requirements / Frequency | 50Hz | 50Hz |
| Breaker / Fuse - amps | 25amps | 10amps |
| DIMENSIONS - DOOR OPENING - MM | 464 | 464 |
| DRYER EXHAUST DUCT DIAMETER - IN. (MM)** | 4 (100) | 4 (100) |
| AIRFLOW (CFM) | 215 (6.10) | 230 (6.5) |
| ELECTRIC HEATING ELEMENT (WATTS) | 4,600 | N/A |
| GAS RATING — BTU/HR. (KCAL/HR.) | N/A | 20,000 (5,040) |
| GAS INLET SIZE | N/A | 3/8 NPT |
| MOTOR SIZE - HP (KW) | .33 (.25) | .33 (.25) |

MACHINE SPECIFICATIONS

| DIMENSIONS | | |
|--------------------|-------|-------|
| Width — mm | 686 | 686 |
| Depth — mm | 751 | 751 |
| Height — mm | 1,880 | 1,880 |
| CRATED DIMENSIONS | | |
| Crated Width — mm | 800 | 800 |
| Crated Depth — mm | 900 | 900 |
| Crated Height — mm | 1,950 | 1,950 |
| APPROXIMATE WEIGHT | | |
| Uncrated — kg | 170 | 170 |
| Crated — kg | 185 | 185 |

Dimensions are for planning purposes only. See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

*Based on 2018 United States DOE J2 Testing with factory preset cycles.

**Use 4" (100mm) diameter rigid aluminum or galvanized steel duct. Never use plastic, non-metal, or combustible duct.

+It is recommended that a separate circuit serving only this washer / dryer be provided.



Visit Dependablelaundry.com.au or call 1800 Maytag