



STT45 45 lb (20 kg)

Built for Reliable Performance

Our line of stack tumble dryers provides double the capacity of Speed Queen® single pocket tumble dryers while using only half the floor space.

- Large easy-to-clean lint compartment
- Fewer moving parts mean fewer maintenance problems and less wear
- High performance heater box increases energy efficiency, reduces drying times and provides a more comfortable operating environment
- Axial airflow pattern with the sealed cylinder rims delivers the fastest and most efficient drying results
- Two drying pockets in the space of one unit helps increase drying capacity
- Single gas, electric and exhaust hookups simplify installation and are less expensive than installing twice the number of single units





Quantum® Gold

In addition to its network capabilities and off- site management features, Quantum® Gold offers additional owner and customer benefits such as PC/ PDA programming and machine audit capabilities, as well as time-of-day pricing of up to a year in advance, a free "lucky cycle" for loyal customers and the ability to interface with the store owner's card manufacturer of choice. As gas prices continue to rise, Quantum Gold enables you to set dry cycle times right down to the second for maximum profitability.




Micro-Display

Our Micro Display Control (MDC) clearly displays the vend price and keeps customers informed throughout the drying process with cycle status lights and a digital cycle countdown. Interfacing with a variety of aftermarket card reader systems, MDC offers four cycle selections, basic audit features and comes installed with a single coin drop.

Stack Classic Tumble Dryer

Specifications

			CTT4E
Control Option	STT45 Ouantum Gold, MDC		
Capacity - lb (kg	2 x 45 (20)		
Overall Width -	34.5 (875)		
Overall Depth - i	48.6 (1235)		
Overall Height - in (mm)			81 (2059)
Cylinder Diamet	33 (838)		
Cylinder Depth -	30 (762)		
Cylinder Volume	14.8 (420)		
Reversing Cylind	Option		
Door Opening S	26.9 (683)		
Heat Input Gas Models - P		Gas Models - Per Pocket	50 Hz - 174,000 Btu/hr 60 Hz - 190,000 Btu/hr
Gas Connection	0.5		
Air Outlet - in (m	1 x 10 (250)		
Motor - HP Fan Cylinder			0.5
			0.5
Airflow - cfm 50 Hz			500 (236)
60 Hz			600 (283)
Electrical Specs - amps	Gas		
	F6	200-208/240V/60/3 3W+G	9.6/9.6
	G2	208-240V/60/1 3W+G	12.0
Shipping Dimensions Width Approxin (mm) Depth			35.5 (900)
			54 (1370)
	85 (2159)		
Net Weight - lb (673 (305)		
Shipping Weight	718 (326)		
Agency Approva	CSA		

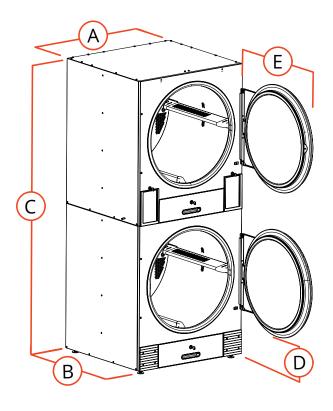

A.	Overall Width - in (mm)	34.5 (875)
В.	Overall Depth - in (mm)	48.6 (1235)
C.	Overall Height - in (mm)	81 (2059)
D.	Door Bottom to Floor - in (mm)	9.3 (236)
E.	Door Swing - in (mm)	31.9 (810)